



**Putzmeister**

## Your benefits

- Large mixer/hopper for more efficient working
- Water metering pipe in the mixer grill prevents blockages
- Lifting mixer with low filling height for convenient filling
- Conforms with CE standards, simple and clear operation
- Fully hydraulic pump and mixer drive with an infinitely variable delivery rate up to 60 l/min
- Quiet 3-cylinder 16.3 kW Kubota engine
- Optimal soundproofing thanks to double-walled canopy
- Optimal manoeuvrability thanks to low drawbar load
- Lasting value thanks to high resale value
- Made in Germany

## SP 11 LMR – Plastering made easy



The comfortable SP 11 LMR worm pump has been specially designed to meet the needs for plastering, filling and grouting work.

The pump can effortlessly convey material over distances of 60 m and to heights of 40 m. You can use site-made mixes or prebagged interior and external plasters, monocoat, fire-proofing mortar, base coat plaster, light-weight masonry mortar, ornamental mortar as well as filling and grouting work.

Your expert Putzmeister dealer will be happy to explain the additional advantages to you and answer all your questions with regard to your individual requirements.

- **Exterior plaster** (lime, lime cement and insulating plaster)
- **Interior plaster** (lime plaster)






The clearly laid out operating panel enables users to control the machine easily and in accordance with CE standards. The delivery rate and water metering are infinitely variable.



The extremely lightweight plastic canopy is particularly robust and optimally protected against corrosion.

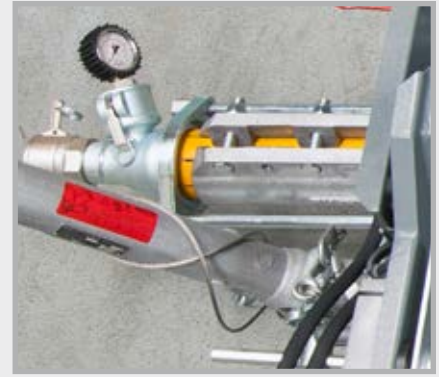

The powerful 2L6 worm pump with M 50 pressure connection is included as part of standard equipment. It can process site-made mixes with up to 6 mm grain size, depending on the desired delivery rate and the properties of the material.

## Technical data

## SP 11 LMR

<b>Mixer drum</b>	180 l
<b>Feed hopper</b>	220 l
<b>Delivery rate*</b>	5–60 l/min
<b>Delivery pressure</b>	25 bar
<b>Delivery range**</b>	60 m horizontal and 40 m vertical for exterior/interior plaster
<b>Compressor</b>	2-cylinder, 400 l/min, 7 bar
<b>Pump</b>	Worm pump 2L6
<b>Engine</b>	3-cylinder Kubota diesel, 16.3 kW at 2,600 rpm
<b>Weight (fully fuelled)</b>	750 kg
<b>Length × width × height</b>	3,260 × 1,420 × 1,160 mm
<b>Filling height</b>	800 mm
<b>Maximum particle size</b>	6 mm
<b>Chassis</b>	unbraked, suitable for road use
<b>Maximum particle size</b>	6 mm

\* The delivery rate is theoretical and depends on the pump pressure.

\*\* The data is based on experience and is dependent on the materials used.

## Equipment

Car cable adapter	■
Car coupling	■
Cleaning tool	■
Grease cartridge	■
High-pressure cleaner	■
Instruction manual and spare parts list	■
Lever press with hose	■
Mechanical water metering	■
Seal ring for mortar coupling	■
Standard colour paintwork	■
Standard tool	■
Cable remote control 20 m	□
Dust extraction	□
Radio remote control 20 m	□
Special canopy paint in RAL colours	□
Support wheel	□
Truck coupling	□
Vibrating screen	□
Working lights	□

□ Option    ■ Standard

## Putzmeister Mörtelmaschinen GmbH

Max-Eyth-Straße 10 · 72631 Aichtal / Germany  
P.O.Box 2152 · 72629 Aichtal / Germany  
Tel. +49 7127 599-0 · Fax +49 7127 599-743  
mm@pmw.de · www.pmmortar.de

